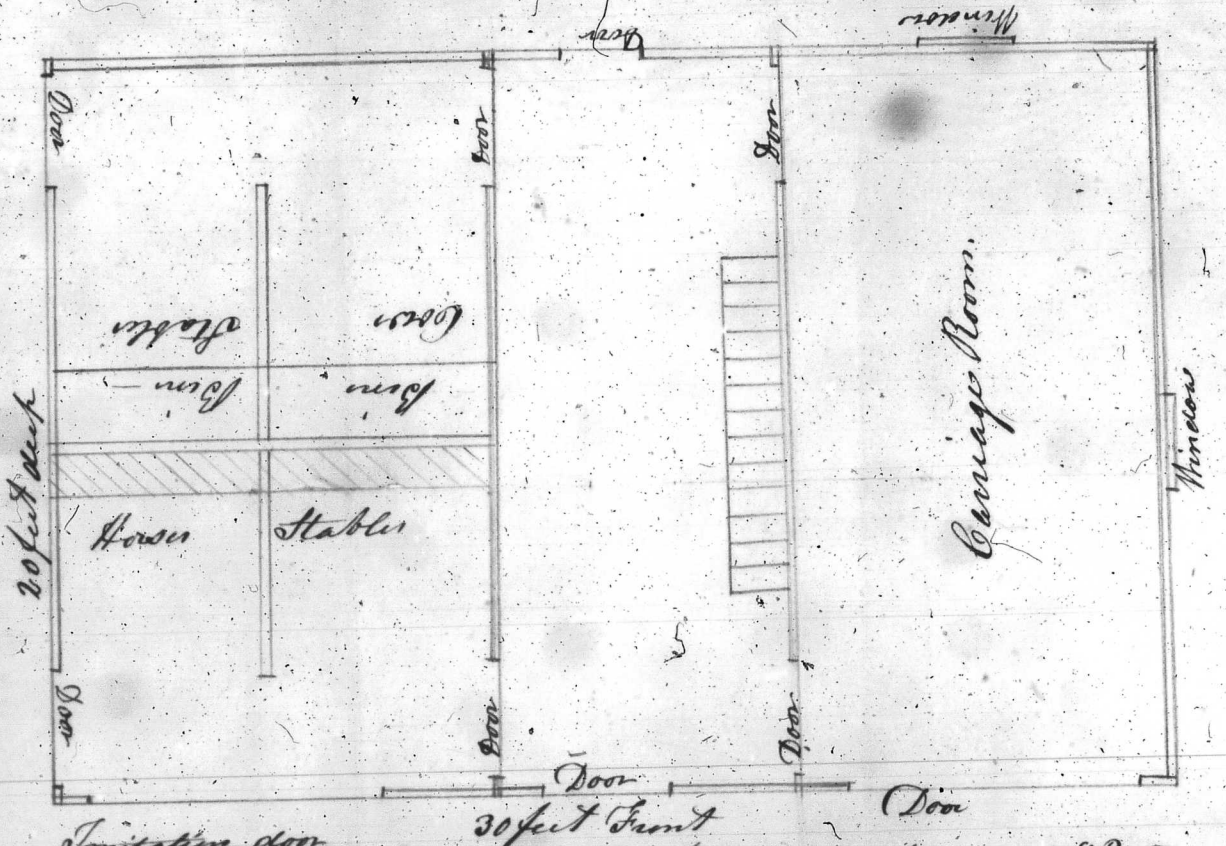

Imitation door

This plan shows the ground floor for a Barn 30 feet by 20. 15 feet Posts to be covered on the upright with Albany boards planed. roof of Cedar Shingles. Floors of Plank grooved and tongued. Carriage room Partitioned from the Center floor. Stables for Horses & Cows. with Partition and Bins &c — Chemist Steepers to the Stables — sufficient Hinges and fastnings to the Doors — Windows where necessary & No Painting or Foundation included in the estimate — which is $365 —